

Optimal Partitioning for Dual Pivot Quicksort

Martin Aumüller and Martin Dietzfelbinger

Faculty of Computer Science and Automation, Ilmenau University of Technology,
98694 Ilmenau, Germany
martin.aumueller@tu-ilmenau.de, martin.dietzfelbinger@tu-ilmenau.de

Abstract. *Dual pivot quicksort* refers to variants of classical quicksort where in the partitioning step two pivots are used to split the input into three segments. This can be done in different ways, giving rise to different algorithms. Recently, a dual pivot algorithm due to Yaroslavskiy received much attention, because it replaced the well-engineered quicksort algorithm in Oracle’s Java 7 runtime library. Nebel and Wild (ESA 2012, best paper award) analyzed this algorithm and showed that on average it uses $1.9n \ln n + O(n)$ comparisons to sort an input of size n , beating standard quicksort, which uses $2n \ln n + O(n)$. We introduce a model that captures all dual pivot algorithms, give a unified analysis, and identify a new dual pivot algorithm that minimizes the expected number of key comparisons among all possible algorithms. This minimum is $1.8n \ln n + o(n \ln n)$. We identify a dual pivot strategy whose comparison number is only $O(n)$ away from the optimum. If pivots are chosen from a sample of size 5, the minimum is $1.623n \ln n + o(n \ln n)$. We also include remarks about minimizing the expected number of swaps.

1 Introduction

Quicksort [6] is a thoroughly analyzed classical sorting algorithm, described in standard textbooks [2,7,11] and with implementations in practically all algorithm libraries. Following the divide-and-conquer paradigm, on an input consisting of n elements to be sorted quicksort uses a pivot element to partition its input elements into two parts, those smaller than the pivot and those larger than the pivot, and then uses recursion to sort these parts. It is well known that if the input consists of n elements with distinct keys in random order and the pivot is picked by just choosing an entry then quicksort uses an expected number of $2n \ln n + O(n)$ comparisons. In 2009, Yaroslavskiy announced¹ that he had found an improved quicksort implementation, the claim being backed by experiments. After extensive empirical studies, in 2009 Yaroslavskiy’s algorithm became the new standard quicksort algorithm in Oracle’s Java 7 runtime library. This algorithm employed two pivot elements to split the elements. If two pivots p and q with $p < q$ are used, the partitioning step partitions the remaining $n - 2$ elements into 3 parts: those

¹ An archived version of the relevant discussion in a Java newsgroup can be found at <http://permalink.gmane.org/gmane.comp.java.openjdk.core-libs.devel/2628>. Also see [12].

$\dots < p$	p	$p < \dots < q$	q	$\dots > q$
-------------	-----	-----------------	-----	-------------

Fig. 1. Result of the partition step in dual pivot quicksort schemes using two pivots p, q with $p < q$. All elements smaller than p are moved to the left of p ; all elements larger than q are moved to the right of q . All other elements lie between p and q .

smaller than p (*small* elements), those in between p and q (*medium* elements), and those larger than q (*large* elements), see Fig. 1.² Recursion is then applied to the three parts. As remarked in [12], it came as a surprise that two pivots should help, since in his thesis [9] Sedgewick had proposed and analyzed a dual pivot approach that was inferior to classical quicksort. Later, Hennequin in his thesis [5] studied the general approach of using $s \geq 1$ pivot elements, but found no improvements over standard quicksort.

In [12] (best paper award at ESA 2012) Nebel and Wild analyzed a simplified version of Yaroslavskiy’s algorithm. (For completeness, this algorithm is given as Algorithm 7 in Appendix B.2.) They showed that it makes $1.9n \ln n + O(n)$ key comparisons in expectation, in contrast to the $2n \ln n + O(n)$ of standard quicksort and the $\frac{32}{15}n \ln n + O(n)$ of Sedgewick’s dual pivot algorithm. On the other hand, they showed that the number of expected swap operations in Yaroslavskiy’s algorithm is $0.6n \ln n + O(n)$, which is much higher than the $0.33n \ln n + O(n)$ expected swap operations in classical quicksort. In this paper, also following tradition, we concentrate on the comparison count and on asymptotic results.

The authors of [12] state that the reason for Yaroslavskiy’s algorithm being superior were that his “partitioning method is able to take advantage of certain asymmetries in the outcomes of key comparisons.” They also state the their “Algorithm 2 [Sedgewick’s dual pivot method] fails to utilize them, even though being based on the same abstract algorithmic idea.” So the abstract algorithmic idea of using two pivots can lead to different algorithms with different behavior. In this paper we describe the design space from which all these algorithms originate. We fully explain which simple property makes some dual pivot algorithms perform better and some perform worse, and identify an optimal member of this design space, which will use $1.8n \ln n + o(n \ln n)$ comparisons on average—even less than Yaroslavskiy’s method.

The first observation is that everything depends on the cost of the partitioning step. This is not new at all. Actually, in Hennequin’s thesis [5] the connection between partitioning cost and overall comparisons for quicksort variants with more than one pivot is analyzed in detail. The result relevant for us is that if two pivots are used and the (expected) partitioning cost for n elements can be bounded by $a \cdot n + O(1)$, for a constant a , then the expected number of

² For ease of discussion we assume in this theoretical study that all elements have different keys. Of course, in implementations equal keys are an important issue that requires a lot of care [10].

comparisons for sorting is

$$\frac{6}{5}a \cdot n \ln n + O(n). \quad (1)$$

(In this paper the constant with the leading term is all that interests us. The reader should be warned that for real-life n the linear term can have a big influence on the expected number of comparisons.)

The second observation is that the partitioning cost depends on certain details of the partitioning procedure. This is in contrast to standard quicksort with one pivot where partitioning always takes $n - 1$ comparisons. In [12] it is shown that Yaroslavskiy's partitioning procedure needs $\frac{19}{12}n + O(1)$ comparisons, while Sedgewick's needs $\frac{16}{9}n + O(1)$. For understanding what is going on it is helpful to forget about concrete implementations with loops in which indices move along in arrays, and entries are swapped, and look at partitioning with two pivots in a more abstract way: Assume for simplicity the input is a permutation of set $\{1, \dots, n\}$, and pivots p and q with $p < q$ have been chosen. The task is to *classify* the other $n - 2$ elements into the classes “small” ($s = p - 1$ many), “medium” ($m = q - p - 1$ many), and “large” ($\ell = n - q$ many), by comparing these elements one after the other with p or q , or both of them if necessary. The only choice the algorithm can make is whether to compare with p or q first. In Sedgewick's and in Yaroslavskiy's algorithm this decision is made on grounds of the position of certain pointers and the state of control. Seen in an abstract way, it is simply “ p first” or “ q first”. Let s_q be the number of small elements compared with q first, and ℓ_p be the number of large elements compared with p first. Then the total number of comparisons is

$$n - 2 + m + s_q + \ell_p. \quad (2)$$

On average over all possible positions of the pivots p and q the term $n - 2 + m$ will lead to $\frac{4}{3}n + O(1)$, independent of the algorithm. The only quantity that depends on the partition procedure is $w = s_q + \ell_p$, the number of elements that are compared with the “wrong” pivot first. Given a partitioning procedure, this is a random variable, depending on the random order of the elements. Fix p and q , let $s = p - 1$ and $\ell = n - q$, and let $w_{s,\ell}$ be the expectation of w , conditioned on these values, averaged over all possible arrangements of the remaining $n - 2$ elements. Now, if (in expectation) f_p elements are compared with p first and (in expectation) f_q elements are compared with q first, then we will show that

$$w_{s,\ell} = f_q \cdot s/n + f_p \cdot \ell/n + o(n), \quad (3)$$

by the randomness of the order. The details of the algorithm will determine f_p and f_q and hence $w_{s,\ell}$ as well, and thus decide whether the partitioning algorithm and hence the whole sorting procedure uses fewer or more comparisons. This seemingly simple insight is the first main message of this paper. It has two consequences, one for the analysis and one for the design of dual-pivot algorithms:

- (i) In order to *analyze* a dual pivot algorithm, given by its partition procedure, find out what f_p and f_q are for this algorithm. This will give $w_{s,\ell}$, which must

then be averaged over all p, q to find the expected number of comparisons. Then apply (1).

- (ii) In order to *design* a good partition procedure try to make $f_q \cdot s/n + f_p \cdot \ell/n$ small.

We shall demonstrate approach (i) in Section 4. An example: As explained in [12], in Yaroslavskiy's algorithm we have $f_q \approx \ell$ and $f_p \approx s + m$. Thus for given p and q we have $w_{s,\ell} = (\ell s + (s + m)\ell)/n + o(n)$. This must be averaged over all possible values of p and q (to yield $\frac{1}{4}n + o(n)$, which together with $\frac{4}{3}n + O(1)$ gives $\frac{19}{12}n + o(n)$, close to the result from [12]).

Principle (ii) will be used to identify optimal partition procedures, beating Yaroslavskiy's method. In brief, such a strategy should achieve the following: If $s > \ell$, compare (almost) all entries with p first ($f_p \approx n$ and $f_q \approx 0$), otherwise compare (almost) all entries with q first ($f_p \approx 0$ and $f_q \approx n$). Of course, some details have to be worked out: How can the algorithm decide which case applies? In which technical sense is this strategy optimal? This will be done in Sect. 5.

Contribution of this paper. We analyze known approaches to dual pivot quicksort in a unified way. The analysis of all these methods boils down to finding out which fractions of the elements are compared with the smaller resp. larger pivot first. We show that the following strategy is optimal: *If there are more small elements than large elements, then always compare with the smaller pivot first. Otherwise, always compare with the larger pivot first.* In implementing this, we utilize the well-known strategy of *random sampling*, which can be incorporated directly into the partitioning step to obtain a quite natural optimal partitioning procedure. For the analysis, we use suitable (martingale) tail bounds. Using different methods, in Section 3 we exhibit and analyze an algorithm whose expected number of comparisons is only $O(n)$ away from the absolute minimum. When implementing dual pivot quicksort, it is beneficial to choose the pivot elements as the second- and fourth-largest in a sample of size 5. We analyze this in Sect. 6. For the question of how to decrease the number of swaps, it is interesting to reconsider algorithms for the Dutch national flag problem [1] that have been used for quicksort with equal keys [10]. This is done in Section 7.

Results. The theoretical results of our paper are summarized in Table 1. The new partitioning method achieves the lowest expected number of key comparisons up to an additive error of $o(n \ln n)$. When pivots are chosen from a small sample, our method significantly decreases the leading coefficient when compared to the well-understood median of three quicksort. This is in contrast to Yaroslavskiy's algorithm, which decreases this coefficient only by 0.01.

To reduce the expected number of swap operation, dual pivot quicksort algorithms can build upon the work that has been done in the context of the Dutch national flag problem (see, e.g., [1]). Using previous work on this problem, we show that one can in fact decrease the expected swap count drastically from $0.6n \ln n + O(n)$ (Yaroslavskiy's algorithm) to $0.33..n \ln n + O(n)$.

As noted by Wild *et al.* [13], considering only key comparisons and swap operations does not suffice to evaluate the practicability of sorting algorithms. In

Method	$E(C_n)$	Method	$E(C_n)$
QS	$\approx 2.0n \ln n + O(n)$	CQS (1/3)	$\approx 1.714n \ln n + O(n)$
Yaro	$\approx 1.9n \ln n + O(n)$	Yaro (2/5)	$\approx 1.704n \ln n + O(n)$
Optimal	$\approx 1.8n \ln n + o(n \ln n)$	Optimal (2/5)	$\approx 1.623n \ln n + o(n \ln n)$

Table 1. Main results of our paper. On the left, we show the expected comparison count $E(C_n)$ of the methods considered in this paper. (QS: Quicksort, Yaro: Yaroslavskiy’s algorithm, Optimal: Our proposed method.) On the right, we show variants of these algorithms that choose the pivots from a small sample of the array. Clever quicksort uses the median of three elements; Yaroslavskiy’s algorithm and our approach use the second- and fourth-largest elements from a sample of five elements. The information-theoretic lower bound for comparison based sorting is $1.44269.. \cdot n \ln n + O(n)$.

Section 8, we will see the following experimental results: When sorting integers, our method is slower than Yaroslavskiy’s algorithm. When sorting strings (and key comparisons become more expensive), we gain a small advantage.

2 Average Case Analysis of Dual Pivot Quicksort

We assume the input sequence $(a_1, \dots, a_n)$ to be a random permutation of $\{1, \dots, n\}$, each permutation occurring with probability $(1/n!)$. If $n \leq 1$, there is nothing to do; if $n = 2$, we sort by one comparison. Otherwise, choose the first element a_1 and the last element a_n as pivots, and set $p = \min(a_1, a_n)$ and $q = \max(a_1, a_n)$. Clearly, each pair p, q with $1 \leq p < q \leq n$ appears as pivots with probability $1/\binom{n}{2}$. We count the number of key comparisons needed to sort the given input. Let C_n be the random variable counting this number for a random input. Let P_n denote the partitioning cost to partition the input sequence into small, medium, and large elements. As explained by Wild and Nebel [12, Appendix A], the expected number of key comparisons obeys the following recurrence:

$$E(C_n) = E(P_n) + \frac{2}{n(n-1)} \cdot 3 \sum_{k=0}^{n-2} (n-k-1) \cdot E(C_k).$$

If $E(P_n) = a \cdot n + O(1)$, for a constant a , this can be solved (cf. [5,12]) to give

$$E(C_n) = \frac{6}{5}a \cdot n \ln n + O(n). \quad (4)$$

In the following, we will analyze different strategies that solve the following (simplified) problem: Given a random permutation $(a_1, \dots, a_n)$ of $\{1, \dots, n\}$ as the input sequence and a_1 and a_n as the two pivots p and q , classify each of the remaining $n - 2$ elements as being *small* (i.e., smaller than p), *medium* (i.e., larger than p but smaller than q), or *large* (i.e., larger than q). We are interested in the number of key comparisons needed to classify these elements. Note that in

our setting there are exactly $s := p - 1$ small elements, $m := q - p - 1$ medium elements, and $\ell := n - q$ large elements. Although this classification does not yield an actual partition of the input sequence, for all approaches considered in this paper it is possible to generalize the classification algorithm to a partitioning algorithm using only swap operations but no additional key comparisons.

We fix the following assumptions being valid for all classification algorithms. Classifying each of the remaining $n - 2$ elements w.r.t. to the two pivots p and q needs 1 key comparison to check if $a_1 < a_n$. Afterwards, each of the $n - 2$ elements has to be compared at least once against p or q . Additionally, each *medium* element has to be compared to p and q . We expect $(n - 2)/3$ medium elements. For given p and q , let s_q denote the number of small elements compared to q first (the number of small elements that need 2 comparisons for classification), and let ℓ_p denote the number of large elements compared to p first (the number of large elements that need 2 comparisons for classification). Using conditional expectation on the pivot choices, we calculate $E(P_n)$ as follows:

$$E(P_n) = (n - 1) + (n - 2)/3 + \frac{1}{\binom{n}{2}} \sum_{1 \leq p < q \leq n} (E(s_q) + E(\ell_p)). \quad (5)$$

We call the third summand the *additional cost term*, as it is the only value that depends on the actual classification algorithm.

3 Analyzing the Additional Cost Term

To analyze the additional cost term, we will use the following formalization: A classification algorithm (or *strategy*) is a three-way decision tree T with a root and $n - 2$ levels of inner nodes as well as one leaf level. The root of this decision tree is on level 0. Each node v is labeled with an index $i \in \{2, \dots, n - 1\}$ and an element $l(v) \in \{\sigma, \lambda\}$. If $l(v)$ is σ , then a_i is compared with the smaller pivot first; otherwise, i.e., $l(v) = \lambda$, it is compared with the larger pivot first. On each of the 3^{n-2} paths each index occurs exactly once. The three edges out of a node are labeled σ, μ, λ , resp., representing the outcome of the classification as small, medium, large, respectively. For an edge e its label is given by $l'(e)$. For each input there is exactly one associated path w from the root of the tree to a leaf; the classification of the elements can then be read off from the node and edge labels.

Identifying a path w from the root to a leaf v by the sequence of nodes and edges $(v_1, e_1, v_2, e_2, \dots, v_{n-2}, e_{n-2}, v)$ on it, we define the cost c_w as

$$c_w = \left| \{j \in \{1, \dots, n - 2\} \mid l'(e_j) \neq \mu, l(v_j) \neq l'(e_j)\} \right|.$$

For a given input, the cost of the path associated with this input exactly describes the number $s_q + \ell_p$ of additional comparisons on this input. An example for such a decision tree is given in Figure 2.

For a random input, let p_v be the probability that node v is reached. The probability that on the i -th level the algorithm classifies an element as being

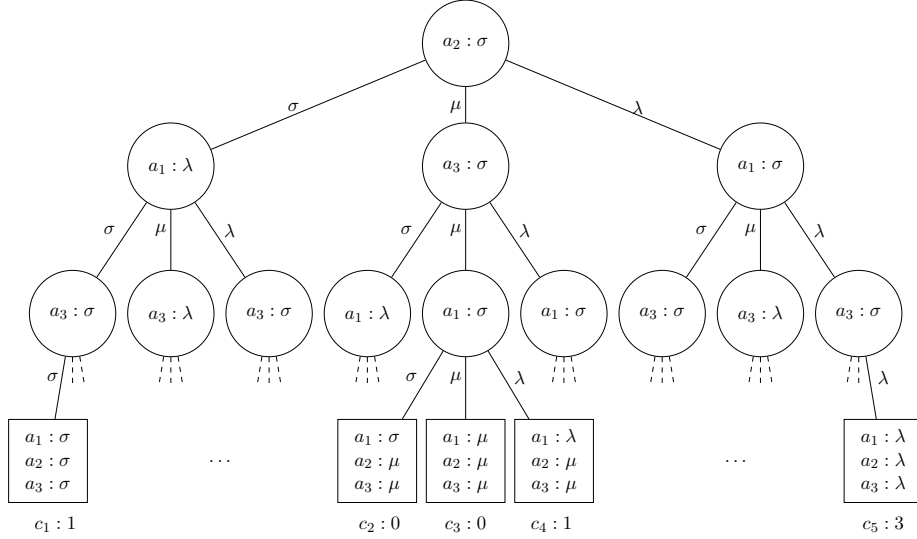


Fig. 2. An example for a decision tree to classify three elements a_1, a_2 , and a_3 . Five out of the 27 leaves are explicitly drawn, showing the classification of the elements and the costs c_i of the specific paths.

small, medium, or large, resp., depends only on the number of small, medium, and large elements, resp., classified so far, but not on which of the $n - 2 - i$ still unclassified elements is chosen. This follows from the randomness of the input sequence. So w.l.o.g. all nodes on level i are labeled with the index $i + 2$ —and we can forget these names.

3.1 Two Optimal Strategies

Having fixed this notation, we can look for an *optimal strategy*, i.e., a strategy that *minimizes* the additional cost term. We first study the (unrealistic!) setting where s and ℓ , i.e., the number of small resp. large elements, are known to the algorithm after the pivots are chosen, and the algorithm can use a different decision tree for each such pair of values. For this, we say that s_i and ℓ_i , resp., are the number of small and large elements, resp., that have been classified in the $(i - 1)$ -st steps. We study the following strategy $\mathcal{O}$: *Given s and ℓ , compare the i -th element to p first if $s - s_i > \ell - \ell_i$, otherwise, compare it with q first.*³

Theorem 1. *Strategy $\mathcal{O}$ is optimal.*

Proof. Fix p and q (and thus s, m , and ℓ) and let an arbitrary decision tree T be given. For a node v in T , we let $Y_v = 0$ if $l(v) = \sigma$, and $Y_v = 1$ if $l(v) = \lambda$.

³ This strategy was suggested by Thomas Hotz via personal communication.

For a node v at level i , we let s_v , m_v , and ℓ_v , resp., denote the number of edges labeled σ , μ , and λ , resp., from the root to v . For a random input, the probability that the element classified in this node is small is exactly $(s - s_v)/(n - i - 2)$. Furthermore, the probability that it is medium is $(m - m_v)/(n - i - 2)$, and that it is large is $(\ell - \ell_v)/(n - i - 2)$.

The probability that on a random input the edge labeled σ of a node v on level i is reached by the algorithm is then $p_v \cdot (s - s_v)/(n - i - 2)$. Conversely, the probability that the edge labeled λ is reached is $p_v \cdot (\ell - \ell_v)/(n - i - 2)$.

We calculate:

$$E(s_q + \ell_p) = \sum_{v \in T} p_v \underbrace{\left(Y_v \cdot \frac{s - s_v}{n - 2 - \text{level}(v)} + (1 - Y_v) \cdot \frac{\ell - \ell_v}{n - 2 - \text{level}(v)} \right)}_{(*)}.$$

For each node $v \in T$, strategy $\mathcal{O}$ labels it in a way that minimizes $(*)$, and hence it minimizes the additional cost term. $\square$

While being optimal w.r.t. minimizing the additional cost term, this strategy assumes that the exact number of small and large elements is known, which of course is never true in a real algorithm. Next, we will show that a single decision tree shared among all choices of p and q can be optimal up to a very small error term.

We study the following strategy $\mathcal{H}$: *Given p and q , compare the i -th element to p first if $s_i > l_i$, otherwise, compare it with q first.*

It is not hard to see that for a given input the number of additional comparisons of strategy $\mathcal{O}$ and $\mathcal{H}$ can differ significantly. The next theorem shows that averaged over all possible inputs, however, there exists only a small difference.

Theorem 2. *Let $E(P_n^{\mathcal{O}})$ be the expected number of key comparisons needed to classify an input of n elements using strategy $\mathcal{O}$. Then $E(P_n^{\mathcal{H}}) = E(P_n^{\mathcal{O}}) + O(\log n)$.*

The proof of this theorem uses the following key insight: Assume that strategy $\mathcal{O}$ inspects the elements in the order $a_n, \dots, a_1$, while $\mathcal{H}$ uses the order $a_1, \dots, a_n$. If the strategies compare the element a_i to different pivots, then $s_{i+1} = \ell_{i+1}$, i.e., there are exactly as many small elements as there are large elements in $a_1, \dots, a_i$. To analyze the difference in the value of the additional cost term, it hence suffices to calculate the expected number of positions $i \in \{1, \dots, n\}$, where $s_{i+1} = \ell_{i+1}$. A rather standard but lengthy calculation shows that this number is $O(\log n)$. The details of the proof are given in Appendix A. In that section, we also show that an additive error term of $O(\log n)$ does not increase the total expected number of key comparisons when we use such a strategy to implement a dual pivot quicksort algorithm.

While both of these strategies are highly adaptive and decide for each element anew which of the pivots is used for the first comparison, this is by no means a requirement for a strategy to be optimal.

Section 5 will introduce a strategy that either compares all elements to p first or compares all elements to q first, based on the result of a small sampling phase. This strategy will be optimal up to lower order terms as well.

Before we can get there, we have to focus on the value of the additional cost term for an arbitrary comparison tree, i.e., an arbitrary classification algorithm.

3.2 Calculating the Value of the Additional Cost Term From a Comparison Tree

Now we describe the connection between the comparison tree T and the additional cost term in general. Let f_p resp. f_q denote the number of comparisons with p resp. q first. We can calculate these to values as

$$f_p = \sum_{v \in T, l(v)=\sigma} p_v \quad f_q = \sum_{v \in T, l(v)=\lambda} p_v.$$

The following theorem shows that these two parameters fully specify the additional cost term up to lower order terms.

Theorem 3. *Let p and q be the two pivots. Let T be a decision tree, and let f_p resp. f_q be as defined above. Then*

$$E(s_q + \ell_p) = f_q \cdot s / (n - 2) + f_p \cdot \ell / (n - 2) + o(n).$$

Proof. Fix p and q (and thus s, m , and ℓ). For a node $v \in T$, let p_v denote the probability that node v is reached by the algorithm on a random input.

For a given node v on level i , we call v *good* if $l(v) = \lambda$ and

$$\left| \frac{s}{n-2} - \frac{s-s_v}{n-i-2} \right| = o(1),$$

or $l(v) = \sigma$ and

$$\left| \frac{\ell}{n-2} - \frac{\ell-\ell_v}{n-i-2} \right| = o(1).$$

Otherwise, v is called *bad*.

For a random input, we calculate:

$$\begin{aligned} E(s_q + \ell_p) &= \sum_{v \in T, l(v)=\lambda} p_v \left(\frac{s-s_v}{n-2-\text{level}(v)} \right) + \sum_{v \in T, l(v)=\sigma} p_v \left(\frac{\ell-\ell_v}{n-2-\text{level}(v)} \right) \\ &\leq \sum_{\substack{v \in T, l(v)=\lambda \\ v \text{ good}}} p_v \left(\frac{s}{n-2} + o(1) \right) + \sum_{\substack{v \in T, l(v)=\lambda \\ v \text{ bad}}} p_v + \\ &\quad \sum_{\substack{v \in T, l(v)=\sigma \\ v \text{ good}}} p_v \left(\frac{\ell}{n-2} + o(1) \right) + \sum_{\substack{v \in T, l(v)=\sigma \\ v \text{ bad}}} p_v \\ &= \frac{s}{n-2} \cdot f_q + \frac{\ell}{n-2} \cdot f_p + o(n) + \sum_{v \in T, v \text{ bad}} p_v, \end{aligned} \tag{6}$$

where the first and second summand follow by the definition of f_p and f_q . For the third summand, consider each of the levels of the decision tree separately. Since the probabilities p_v for nodes v on the same level sum up to 1, the contribution of the $o(1)$ terms is bounded by $o(n)$. Now, it remains to show that the last summand is $o(n)$.

To see this, consider a random input that is classified by this decision tree. We will show that with very high probability we do not reach a bad node in the decision tree for the first $n - n^{3/4}$ levels. Let X_j be the 0-1 random variable that is 1 if the j -th classified element is small; let Y_j be the 0-1 random variable that is 1 if the j -th classified element is large. Let $s_i = X_1 + \dots + X_i$ and $\ell_i = Y_1 + \dots + Y_i$. We will use the method of averaged bounded differences to show that these random variables are tightly concentrated around their expectation.

Claim. Let $1 \leq i \leq n - 2$. Then

$$\begin{aligned}\Pr(|s_i - \mathbb{E}(s_i)| > n^{2/3}) &\leq 2 \exp(-n^{1/3}), \text{ and} \\ \Pr(|\ell_i - \mathbb{E}(\ell_i)| > n^{2/3}) &\leq 2 \exp(-n^{1/3}).\end{aligned}$$

Proof. We focus on proving the first inequality. The second inequality follows analogously.

First, we calculate the difference c_j between the expectation of s_i conditioned on $X_1, \dots, X_j$ resp. $X_1, \dots, X_{j-1}$.

We have

$$\begin{aligned}c_j &= |\mathbb{E}(s_i \mid X_1, \dots, X_j) - \mathbb{E}(s_i \mid X_1, \dots, X_{j-1})| \\ &= \left| X_j + \sum_{k=j+1}^i \frac{s - s_{j-1} - X_j}{n - j - 2} - \sum_{k=j}^i \frac{s - s_{j-1}}{n - j - 1} \right| \\ &= \left| X_j - \frac{(i-j)X_j}{n-j-2} + (i-j) \cdot \frac{s - s_{j-1}}{n-j-2} - (i-j+1) \frac{s - s_{j-1}}{n-j-1} \right| \\ &\leq \left| X_j - \frac{(i-j)X_j}{n-j-2} - (s - s_{j-1}) \frac{n-i-2}{(n-j-2) \cdot (n-j-1)} \right| \\ &\leq |0 - 1 - 1| = 2.\end{aligned}$$

We use the following bound known as the method of averaged bounded differences (see [4, Theorem 5.3]):

$$\Pr(|s_i - \mathbb{E}(s_i)| > t) \leq 2 \exp\left(-\frac{2t^2}{\sum_{j \leq i} c_j^2}\right),$$

and get

$$\Pr(|s_i - \mathbb{E}(s_i)| > n^{2/3}) \leq 2 \exp\left(\frac{-n^{4/3}}{2i}\right),$$

which is not larger than $2 \exp(-n^{1/3})$. $\square$

Now, consider the term $s - s_i$. With high probability we have

$$s - s_i = (n - i - 2) \left(\frac{s}{n} \right) + O(n^{2/3})$$

and get

$$\frac{s - s_i}{n - i - 2} = \frac{s}{n} + O\left(\frac{n^{2/3}}{n - i - 2}\right).$$

The second summand is $o(1)$ for $i \leq n - n^{3/4}$. (We get an analogous result for $(\ell - \ell_i)/(n - i - 2)$.) So, with high probability we reach a good node on level i , for $i \leq n - n^{3/4}$. Thus, the contribution of the sums of the probabilities of bad nodes on a fixed level is $o(1)$ and this contributes $o(n)$ to the latter summand in (6) for the first $n - n^{3/4}$ levels. For the last $n^{3/4}$ levels of the tree, we use that the contribution of the probabilities that we reach a bad node on level i is at most 1 for a fixed level.

This shows that the latter summand in (6) is $o(n)$, and proves the theorem. $\square$

This means that for the analysis of the expected comparison count of a dual pivot quicksort algorithm we just have to find out what f_p and f_q are for this algorithm. Moreover, to design a good algorithm (w.r.t. the expected comparison count), we should try to make $f_q \cdot s/(n - 2) + f_p \cdot \ell/(n - 2)$ small.

The theorem has two technical implications. First, using Theorem 3 in (5), we obtain by a standard calculation

$$\mathbb{E}(P_n) = \frac{4}{3}n + \frac{1}{\binom{n}{2}} \sum_{1 \leq p < q \leq n} \left(\frac{f_q \cdot s}{n - 2} + \frac{f_p \cdot \ell}{n - 2} \right) + o(n), \quad (7)$$

where we call the $o(n)$ term the *error term*. We will now influence the contribution of the error term to the expected number of key comparisons.

As is well known from the traditional analysis of quicksort, the recursion tree for a random input has depth $O(\log n)$ with high probability, e.g., with probability $1 - 1/n^2$. On each level, the sizes $n'_1 + \dots + n'_k$ of the inputs on this level sum up to at most n , and for the contributions of the error terms we get $o(n'_1) + \dots + o(n'_k) = o(n)$. Conditioning on the event that the recursion tree has depth $O(\log n)$, the contribution of the error terms to the expected number of key comparisons is thus $o(n \ln n)$.

Second, considering the actual problem of sorting an input using a dual pivot quicksort algorithm, we remark that the tail bounds used in the proof of Theorem 3 do not give low enough error probabilities if the subarrays appearing in the recursion are too small. We now consider the expected comparison costs of sorting subarrays of small size separately.

Let $n_0 = n^{1/\log \log n}$. Let $n_1, \dots, n_k$ be the sizes of the subarrays that have size at most n_0 in the recursion. Because each element appears in at most one such subarray, we have $n_1 + \dots + n_k \leq n$. In the worst-case, partitioning a subarray

of size n_i costs $2n_i$ key comparisons, which—using (4)—results in an expected comparison count of at most $2.4n_i \ln n_i + O(n_i)$ to sort this subarray. The expected number of comparisons to sort all the subarrays is hence $O(n \ln n_0) = o(n \ln n)$. So, sorting these small subarrays contributes an additive summand of $o(n \ln n)$ to the expected number of key comparisons.

These two observations say that for $E(P_n) = a \cdot n + o(n)$ we have $E(C_n) = 6/5 \cdot a \cdot n \ln n + o(n \ln n)$ when utilizing Theorem 3.

4 Analysis of Some Partitioning Methods

In this section, we will study three different partitioning methods in the light of the formulas from Section 2. First, we will analyze one of the simplest possible ideas to classify each element: Always use p for the first comparison. Second, we will consider a strategy based on Yaroslavskiy’s algorithm. Third, we will study a strategy presented in Sedgewick’s dissertation [9] and a small modification of it.

4.1 Always Compare to p First

We consider strategy $\mathcal{P}$: *For given p and q , always compare with p first.* This strategy makes sure that $f_p = n - 2$ and $f_q = 0$. Plugging this into (7) gives us⁴

$$E(P_n^{\mathcal{P}}) = \frac{4}{3}n + \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n-2} \ell + o(n) = \frac{5}{3}n + o(n).$$

Using (4) we get $E(C_n^{\mathcal{P}}) = 2n \ln n + o(n \ln n)$ —the same as in standard quicksort.

4.2 Analysis of Yaroslavskiy’s Algorithm

Following [12, Section 3.2], Yaroslavskiy’s algorithm is an implementation of the following strategy $\mathcal{Y}$: *For given p and q , compare ℓ elements to q first, and compare the other elements to p first.*

We get that $f_q = \ell$ and $f_p = s + m$. Applying (7), we calculate

$$E(P_n^{\mathcal{Y}}) = \frac{4}{3}n + \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n-2} \left(\frac{s\ell}{n-2} + \frac{(s+m)\ell}{n-2} \right) + o(n) = \frac{19}{12}n + o(n).$$

Using (4) gives $E(C_n^{\mathcal{Y}}) = 1.9n \ln n + o(n \ln n)$, as in [12].

⁴ We omit detailed step-by-step calculations. All calculations can be checked using a standard computer algebra system.

4.3 Analysis of Sedgewick's Algorithm

Following [12, Section 3.2], Sedgewick's algorithm amounts to an implementation of the following strategy $\mathcal{S}$: *For given p and q , compare (in expectation) a fraction of $s/(s + \ell)$ of the keys with q first, and compare the other keys with p first.* We get $f_q = (n - 2) \cdot s/(s + \ell)$ and $f_p = (n - 2) \cdot \ell/(s + \ell)$. Plugging these values into (7), we calculate

$$E(P_n^{\mathcal{S}}) = \frac{4}{3}n + \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n-2} \left(\frac{s^2}{s+\ell} + \frac{\ell^2}{s+\ell} \right) + o(n) = \frac{16}{9}n + o(n).$$

Applying (4) gives $E(C_n^{\mathcal{S}}) = 2.133... \cdot n \ln n + o(n \ln n)$, as known from [12].

Obviously, this is worse than strategy $\mathcal{P}$ considered before. This is easily explained intuitively: If the fraction of small elements is large, it will compare many elements with q first. But this costs two comparisons for each small element. Conversely, if the fraction of large elements is large, it will compare many elements to p first, which is again the wrong decision.

Since Sedgewick's strategy seems to do exactly the opposite of what one should do to lower the comparison count,⁵ we consider the following modified strategy $\mathcal{S}'$: *For given p and q , compare (in expectation) a fraction of $s/(s + \ell)$ of the keys with p first, and compare the other keys with q first.*⁶

Using the same analysis as above, we get $E(P_n^{\mathcal{S}'}) = \frac{14}{9}n + o(n)$ which yields $E(C_n^{\mathcal{S}'}) = 1.866... \cdot n \ln n + o(n \ln n)$ —improving on the standard algorithm and even on Yaroslavskiy's algorithm!

Remark. Exchanging f_p and f_q as in the strategy described above is a general technique. In fact, if the leading coefficient of the expected number of comparisons for a fixed choice of f_p and f_q is α , e.g., $\alpha = 2.133...$ for strategy $\mathcal{S}$, then the leading coefficient of the strategy that exchanges f_p and f_q is $4 - \alpha$, e.g., $4 - 2.133... = 1.866...$ as in strategy $\mathcal{S}'$.

To make this precise, let $\mathcal{A}$ be a strategy that uses a fixed choice of f_p and f_q . Let $\mathcal{A}'$ be a strategy that uses $f'_p = f_q$ and $f'_q = f_p$, i.e., exchanges the expected number of comparisons to p resp. q first. Since $f_p = (n - 2 - f_q)$, summing up to the additional cost terms of $\mathcal{A}$ and $\mathcal{A}'$ in (7) gives us

$$\begin{aligned} & \frac{1}{\binom{n}{2}} \left(\sum_{1 \leq p < q \leq n} \left(\frac{f_q \cdot s}{n-2} + \frac{f_p \cdot \ell}{n-2} \right) + \sum_{1 \leq p < q \leq n} \left(\frac{f'_q \cdot s}{n-2} + \frac{f'_p \cdot \ell}{n-2} \right) \right) \\ &= \frac{1}{\binom{n}{2}} \sum_{1 \leq p < q \leq n} s + \ell = \frac{2}{3}(n-2). \end{aligned}$$

So, if the additional cost term of $\mathcal{A}$ is bounded by $b \cdot n + O(1)$, for a constant b , then the additional cost term of $\mathcal{A}'$ is bounded by $(2/3 - b) \cdot n + O(1)$. Now let

⁵ We remark that in his thesis Sedgewick [9] focused on the expected number of swaps.

⁶ Implementations of strategy $\mathcal{S}$ and $\mathcal{S}'$ can be found in Appendix B.1.

$\alpha = 6/5 \cdot (4/3 + b)$, i.e., $E(C_n^A) = \alpha \cdot n \ln n + o(n \ln n)$. Using (4), we obtain by a standard calculation

$$\begin{aligned} E(C_n^{A'}) &= \frac{6}{5} \cdot \left(\frac{4}{3} + \frac{2}{3} - b \right) \cdot n \ln n + o(n \ln n) \\ &= (4 - \alpha)n \ln n + o(n \ln n), \end{aligned}$$

which precisely describes the influence of exchanging f_p and f_q to the value of the expected comparison count.

5 An Optimal Partitioning Method

Looking at the previous sections, all methods used the idea that we should compare a certain fraction of the elements to p first, and all other elements to q first. On the other hand, the optimal methods presented in Section 3 were highly adaptive—counting the number of small and large elements seen so far and using this to decide which pivot is chosen for the first comparison for the next element. In this section, we will show that the following strategy $\mathcal{D}$ is optimal: *If $s > \ell$ then always compare with p first, otherwise, always compare with q first.*

Of course, for an implementation of this strategy we have to deal with the problem of finding out which case applies before all comparisons have been made. We consider a solution to this problem at the end of this section.

5.1 Analysis and Optimality of the Ideal Classification Strategy

Assume for a moment that for a given random input with pivots p, q , the strategy “magically” knows if $s > \ell$ and correctly determines the pivot that should be used for all comparisons. For the expected number of key comparisons one obtains by a standard calculation:

$$E(P_n^{\mathcal{D}}) = \frac{4}{3}n + \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n-2} \min(s, \ell) + o(n) = \frac{3}{2}n + o(n). \quad (8)$$

Applying (4), the total expected number of key comparisons is $E(C_n^{\mathcal{D}}) = 1.8n \ln n + o(n \ln n)$, which is by $0.1n \ln n$ smaller than the expected number of key comparisons in Yaroslavskiy’s algorithm.

To see that this method is optimal, recall that the additional cost term is the only value in (7) that can be influenced by the algorithm. By Theorem 3, this term is fully determined by the parameters f_q and f_p up to lower order terms. Since $f_p = n - 2 - f_q$, and

$$E(s_q + \ell_p) = f_q \cdot s/(n-2) + (n-2-f_q) \cdot \ell/(n-2) + o(n)$$

is linear in f_q , it attains its minimum either at $f_q = 0$ or $f_q = n-2$. But this is just what $\mathcal{D}$ chooses. So, $\mathcal{D}$ is optimal up to lower order terms w.r.t. minimizing the expected number of key comparisons.

5.2 Guessing Whether $s > \ell$ or not

We explain how the ideal classification algorithm can be approximated by an implementation. The idea simply is to make a few comparisons and use the outcome as a basis for a guess.

After p and q are chosen, we classify **samplesize** many elements and calculate $d = s' - \ell'$, where s' and ℓ' , resp., is the number of small and large elements, resp., in the sample. If $d < 0$, we guess that $s < \ell$ —so, we classify by comparing with q first; otherwise, we compare with p first. We say that we guess *correctly*, if the value of d correctly reflects if $s < \ell$.

We incorporate guessing errors into (8) as follows:

$$\begin{aligned} E(P_n) &= \frac{4}{3}n + o(n) + \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n-2} \left(\Pr(\text{guess correct}) \cdot \min(s, \ell) + \right. \\ &\quad \left. \Pr(\text{guess wrong}) \cdot \max(s, \ell) \right) \\ &= \frac{4}{3}n + o(n) + \frac{2}{\binom{n}{2}} \sum_{s=0}^{n/2} \sum_{\ell=s+1}^{n-s} \left(\Pr(\text{guess correct}) \cdot s + \right. \\ &\quad \left. \Pr(\text{guess wrong}) \cdot \ell \right). \end{aligned} \quad (9)$$

The following lemma says that for a wide range of values s and ℓ , the probability of a guessing error is exponentially small.

Lemma 1. *Let s and ℓ with $s \leq \ell - n^{3/4}$ and $\ell \geq n^{3/4}$ for $n \in \mathbb{N}$ be given. Let **samplesize** $= n^{2/3}$. Then $\Pr(d > 0) = \exp(-2n^{1/6}/9)$.*

Proof. Let $n' = n^{2/3}$. Let X_i be a random variable that is -1 if the i -th classified element is a large element, 0 if it is a medium element, and 1 if it is a small element. Let $d = \sum_{i=1}^{n'} X_i$.

Using the assumptions on the values of s and ℓ , straightforward calculations show that $E(d) \leq -n'/n^{1/4} = -n^{5/12}$. Furthermore, we have that

$$c_i = |E(d \mid X_1, \dots, X_i) - E(d \mid X_1, \dots, X_{i-1})| \leq 3, i \in \{1, \dots, n'\}.$$

To see this, we let s_i resp. ℓ_i denote the number of small resp. medium elements that are still present if $X_1, \dots, X_i$ are classified. Furthermore, let Y_i be the 0-1 random variable that is 1 if X_i is 1, and let Z_i be the 0-1 random variable that is 1 if X_i is -1 .

We calculate:

$$\begin{aligned}
& |\mathbb{E}(d \mid X_1, \dots, X_i) - \mathbb{E}(d \mid X_i, \dots, X_{i-1})| \\
&= \left| \sum_{j=1}^i X_j + \sum_{j=i+1}^{n'} \left[\Pr(X_j = 1 \mid X_1, \dots, X_i) - \Pr(X_j = -1 \mid X_1, \dots, X_i) \right] \right. \\
&\quad \left. - \sum_{j=1}^{i-1} X_j - \sum_{j=i}^{n'} \left[\Pr(X_j = 1 \mid X_1, \dots, X_{i-1}) - \Pr(X_j = -1 \mid X_1, \dots, X_{i-1}) \right] \right| \\
&= \left| X_i + \sum_{j=i+1}^{n'} \left[\frac{s_i}{n-i} - \frac{\ell_i}{n-i} \right] - \sum_{j=i}^{n'} \left[\frac{s_{i-1}}{n-i+1} - \frac{\ell_{i-1}}{n-i+1} \right] \right| \\
&= \left| X_i + \sum_{j=i+1}^{n'} \left[\frac{s_{i-1} - Y_i}{n-i} - \frac{\ell_{i-1} - Z_i}{n-i} \right] - \sum_{j=i}^{n'} \left[\frac{s_{i-1}}{n-i+1} - \frac{\ell_{i-1}}{n-i+1} \right] \right| \\
&= \left| X_i - \frac{(n' - i) \cdot (Z_i - Y_i)}{n - i} + s_{i-1} \left(\frac{n' - i}{n - i} - \frac{n' - i + 1}{n - i + 1} \right) + \ell_{i-1} \left(\frac{n' - i + 1}{n - i + 1} - \frac{n' - i}{n - i} \right) \right| \\
&= \left| X_i - \frac{(n' - i) \cdot (Z_i - Y_i)}{n - i} + s_{i-1} \left(\frac{n' - n}{(n - i)(n - i + 1)} \right) + \ell_{i-1} \left(\frac{n - n'}{(n - i)(n - i + 1)} \right) \right| \\
&= \left| X_i - \frac{(n' - i) \cdot (Z_i - Y_i)}{n - i} + (\ell_{i-1} - s_{i-1}) \cdot \left(\frac{n - n'}{(n - i)(n - i + 1)} \right) \right| \\
&\leq \left| X_i + (Z_i - Y_i) + 1 \right| \leq 3
\end{aligned}$$

Using the method of averaged bounded differences (see [4, Theorem 5.3])

$$\Pr(d > \mathbb{E}(d) + t) \leq \exp \left(-\frac{2t^2}{\sum_{i \leq n'} c_i^2} \right),$$

we get

$$\Pr(d > 0) \leq \exp \left(-\frac{2n^{1/6}}{9} \right). \quad \square$$

Of course, we get an analogous result for $s \geq n^{3/4}$ and $\ell \leq s - n^{3/4}$.

Our classification algorithm will now work as follows. It starts by sampling $\text{samplesize} = n^{2/3}$ many elements and then decides which pivot is used for the first comparison. Then it inspects each element according to this approach.

We can now analyze the expected number of key comparisons of this algorithm.

Theorem 4. *Let $\text{samplesize} = n^{2/3}$. Then the expected comparison count of the algorithm described above is $1.8n \ln n + o(n \ln n)$.*

Proof. First, sample `samplesize` many elements. The number of key comparisons to calculate d is at most $2n^{2/3} = o(n)$. By symmetry, we may focus on the case that $s \leq \ell$. We distinguish the following three cases:

1. $\ell \leq n^{2/3}$: The contribution of terms in (9) for this case is at most

$$\frac{2}{\binom{n}{2}} \sum_{\ell=0}^{n^{2/3}} \sum_{s=0}^{\ell} \ell = O(1).$$

2. $\ell - n^{2/3} \leq s \leq \ell$: The contribution of terms in (9) in this case is at most

$$\frac{2}{\binom{n}{2}} \sum_{s=0}^{n/2} \sum_{\ell=s}^{\min(s+n^{2/3}, n-s)} \ell = o(n).$$

3. $\ell \geq n^{2/3}$ and $s \leq \ell - n^{2/3}$. Let $m(\ell) = \min(n - \ell, \ell - n^{2/3})$. Following Lemma 1, the probability of guessing wrong is at most $\exp(-2n^{1/6}/9)$. The contribution of this case in (9) is hence at most

$$\frac{2}{\binom{n}{2}} \sum_{\ell=n^{2/3}}^n \sum_{s=0}^{m(\ell)} \left(s + \exp(-2n^{1/6}/9) \ell \right) \leq \left(\frac{2}{\binom{n}{2}} \sum_{\ell=n^{2/3}}^n \sum_{s=0}^{m(\ell)} s \right) + o(1).$$

Thus, the contribution of sampling and estimation errors is $o(n)$. As discussed in Section 2, small subarrays created in the recursion are directly sorted with a standard $O(n \ln n)$ sorting algorithm, which yields an additional summand of $o(n \ln n)$ to the expected number of key comparisons.

In conclusion, we expect a partitioning step to make $\frac{3}{2}n + o(n)$ key comparisons, see (8). Applying (4), we get $E(C_n) = 1.8n \ln n + o(n \ln n)$. $\square$

6 Choosing Pivots From a Sample

We consider here the variation of dual pivot quicksort in which the two pivots are chosen from a sample of 5 elements. We choose the second-largest and fourth-largest as pivots. (This is the pivot choice that is used in Yaroslavskiy's algorithm in the JRE7 implementation, see [13] for further discussion.) The probability that p and q , $p < q$, are chosen as pivots is exactly $(s \cdot m \cdot \ell) / \binom{n}{5}$. Following Hennequin [5, pp. 52–53], for partitioning costs $E(P_n) = a \cdot n + O(1)$ we get

$$E(C_n) = \frac{1}{H_6 - H_2} \cdot a \cdot n \ln n + O(n) = \frac{20}{19} \cdot a \cdot n \ln n + O(n), \quad (10)$$

where H_n denotes the n -th harmonic number. In our setting, applying Theorem 3 yields expected partitioning costs of $a \cdot n + o(n)$. Using the same argument as in Section 2, the expected comparison count becomes $20/19 \cdot a \cdot n \ln n + o(n \ln n)$.

We will now investigate the effect on the expected number of key comparisons in Yaroslavskiy's resp. our partitioning method. The expected number of medium elements remains $(n - 2)/3$. For strategy $\mathcal{Y}$, we calculate

$$E(P_n^{\mathcal{Y}}) = \frac{4}{3}n + o(n) + \frac{1}{\binom{n}{5}} \sum_{s+\ell \leq n-3} \frac{\ell \cdot (2s + m) \cdot s \cdot m \cdot \ell}{n - 2} = \frac{34}{21}n + o(n).$$

Applying (10), we get $E(C_n^{\mathcal{Y}}) = 1.704n \ln n + o(n \ln n)$ key comparisons. (Note that Wild *et al.* [13] calculated this leading coefficient as well.) This is slightly better than “clever quicksort”, which uses the median of a sample of three elements as a single pivot element and achieves $1.714n \ln n + O(n)$ expected key comparisons [6]. For our proposed partitioning method, assuming no estimation errors, we get

$$E(P_n^{\mathcal{D}}) = \frac{4}{3}n + o(n) + \frac{2}{\binom{n}{5}} \sum_{\substack{s+\ell \leq n-3 \\ s \leq \ell}} s \cdot s \cdot m \cdot \ell = \frac{37}{24}n + o(n).$$

Again using (10), we obtain $E(C_n^{\mathcal{D}}) = 1.623n \ln n + o(n \ln n)$, which is optimal as well. By applying random sampling as above, we get an algorithm that makes $1.623n \ln n + o(n \ln n)$ expected key comparisons, improving further on the leading coefficient compared to clever quicksort and Yaroslavskiy's algorithm.

7 Swaps In Dual Pivot Quicksort

After the discussion of key comparisons in dual pivot quicksort, we will now turn the focus on minimizing swap operations. Fortunately, we can build on work that has been done for the so-called *Dutch National Flag* problem. This problem is defined as follows: Given an array containing n elements, where each element is either red, blue or white, rearrange the elements using swaps such that they resemble the national flag of the Netherlands (red followed by white followed by blue). One immediately sees the connection between this problem and the partitioning problem in the context of dual pivot quicksort, for the partitioning problem deals with classifying elements into three different types called small, medium, and large, resp, and rearranging these elements such that small elements are followed by medium elements which are followed by large elements. We quickly review the work done on this problem, and then analyze the expected swap count of these algorithms when using them for dual pivot quicksort. Many results on the DNF cannot be applied directly, since the probability spaces differ.

7.1 Algorithms for the Dutch National Flag Problem

Here, we present three algorithms that solve the DNF problem. We state them in our notation, using small, medium, and large elements, resp., instead of red, white, and blue elements, resp. We assume that A is an array of length n containing small, medium, and large elements.

The first algorithm is due to Dijkstra [3].

Algorithm 1 (SwapA).

```

procedure DijkstraSwap( $A[1..n]$ )
1    $i := 1; j := n; k := n$ 
2   while  $i \leq j$ 
3       classify  $A[j]$ 
4       case small:  $swap(i, j); i++;$ 
5       case medium:  $j--;$ 
6       case large:  $swap(j, k); j--; k--;$ 
7   end while

```

The second algorithm is due to Meyer [8]. It avoids swapping uninspected elements (that might be small and hence already present on a suitable position) as done in Algorithm 1 on line 4.

Algorithm 2 (SwapB).

```

procedure MeyerSwap( $A[1..n]$ )
1    $i := 1; j := n; k := n$ 
2   while  $i \leq j$ 
3       classify  $A[j]$ 
4       case small:
5           while  $A[i]$  is small
6                $i++;$ 
7           end while
8           if  $i < j$ 
9                $swap(i, j); i++;$ 
10          case medium:  $j--;$ 
11          case large:  $swap(j, k); j--; k--;$ 
12  end while

```

The next algorithm was explicitly stated by Chen in [1], but has been discussed in [10], too. Instead of classifying elements and moving them to their final position, it uses two stages. In the first stage, it moves all small elements to the left of the array. The second stage moves all large elements to the right, but does not inspect the array part that contains the small elements.

Algorithm 3 (SwapC).

```

procedure SwapC( $A[1..n]$ )
1    $i := 1; j := n;$ 
2   while  $i < j$ 
3       while  $A[i]$  is small and  $i < j$ 
4            $i++;$ 
5       end while
6       while  $A[j]$  is not small and  $i < j$ 
7            $j--;$ 
8   end while

```

```

9         if i < j
10             swap(i,j); i++; j--;
11     end while
12     if i < n
13         j := i; k := n;
14         while j < k
15             while A[j] is medium and j < k
16                 j++;
17             end while
18             while A[k] is large and j < k
19                 k--;
20             end while
21             if j < k
22                 swap(j,k); j++; k--;
23         end while

```

7.2 Analysis of the Expected Swap Count

Given a strategy, e.g., the optimal strategy from Section 5, we get a partitioning procedure for dual pivot quicksort by using Algorithm 1 or Algorithm 2—replacing all classification steps according to the given strategy. In fact, Yaroslavskiy’s algorithm uses strategy $\mathcal{Y}$ together with Meyer’s algorithm.

The situation is a little bit different with Algorithm 3, for it uses that the smaller pivot is used for the first comparison. (This case was analyzed as strategy $\mathcal{P}$ in Section 4.)

For now, we focus on calculating the expected swap count of these algorithms. Note that these algorithms have been analyzed in the setting of the Dutch national flag problem (see, e.g., [1]), but in a different probability space, in which each element independently chooses to be small, medium or large with probability $1/3$.

Analysis of Algorithm 1. Algorithm 1 has the following properties with respect to swap operations:

- (i) Each small element causes exactly one swap.
- (ii) Each large element causes exactly one swap.
- (iii) No medium element causes a swap operation.

For the expected swap count $P_{S,n}^1$ for partitioning an array of length n —conditioning on the pivot choices as before—, we get the following formula:⁷

$$E(P_{S,n}^1) = \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n} (s + \ell) = \frac{2}{3}n + O(1).$$

⁷ When analyzing a partitioning method for dual pivot quicksort, we have to consider that pivots might have been swapped at the beginning. Furthermore, they have to be placed into their correct position at the end. In total, we get an additive summand of $5/2$ to the expected number of swaps, cf. [12]. We omit this summand here.

Note that (4) also holds for the swap case (*cf.* [12]). For the total expected number of swaps S_n for sorting an array of length n using a dual pivot quicksort approach, we hence obtain $E(S_n^1) = 0.8n \ln n + O(n)$.

Analysis of Algorithm 2. Algorithm 2 has the following properties with respect to swap operations for s small and ℓ large elements:

- (i) Each small element that resides in the array positions $s + 1, \dots, n$ causes exactly one swap.
- (ii) Each large element causes exactly one swap.
- (iii) No medium element causes a swap.

For the expected swap count $P_{S,n}^2$ for Algorithm 2, we get

$$E(P_{S,n}^2) = \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n} (s \cdot (n-s)/n + \ell) = \frac{1}{2}n + O(1),$$

which yields a total expected swap count of $E(S_n^2) = 0.6n \ln n + O(n)$. To no surprise, this is exactly the same number as the expected swap count calculated by Wild and Nebel [12] of Yaroslavskiy's algorithm.

When we use the optimal strategy of Section 5, we can further improve this algorithm as follows: After the random sampling step, we make a guess whether $s > \ell$. If this is the case, we use Algorithm 2 and always compare to the smaller pivot first. Otherwise, we slightly change Algorithm 2 by letting j run from 1 to k , swapping the small and large case, i.e., using the inner while loop when $A[j]$ is large to ignore large elements. Conditioning on s and ℓ , almost the same calculations as above show that this algorithm yields a total expected swap count of $0.45n \ln n + O(n)$.

Analysis of Algorithm 3. Algorithm 3 has the following behavior with respect to swap operations for s small and ℓ large elements.

- (i) In the first stage, each small element that resides in the array positions $s + 1, \dots, n$ causes exactly one swap.
- (ii) In the second stage, each large element that resides in the array positions $s + 1, \dots, n - \ell - 1$ causes exactly one swap.
- (iii) No other element causes a swap.

Given a random array containing s small, m medium, and ℓ large elements, note that after the first stage the sequence of array elements at positions $s + 1, \dots, n$ is still random, i.e., each such sequence is equally likely. (This is the same as the property that subarrays occurring in recursive steps of quicksort are fully random, *cf.* [12, Section 3.1].)

For the expected swap count $P_{S,n}^3$ for Algorithm 3, we get

$$E(P_{S,n}^3) = \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n} (s \cdot (n-s)/n + \ell \cdot m/(n-s)) = \frac{5}{18}n + O(1),$$

which gives $E(S_n^3) = 0.33..n \ln n + O(n)$ —and hence significantly decreases the number of swap operations compared to the previous algorithms.

Again, we can use the optimal strategy of Section 5 by deciding if we use Algorithm 3 or its modified version, in which we first split into large and non-large elements after the random sampling step.

8 Experiments

We have implemented the methods presented in this paper in C++. Pseudocode for these methods can be found in Appendix B. These algorithms have not been fine-tuned; this section is hence meant to provide initial results but does not replace a thorough experimental study.

We have incorporated random sampling into the partitioning step of our method from Section 5 by comparing the first $n' = \max(n/100, 7)$ elements with p first. We switched to comparing with q first if the algorithm has seen more large than small element after n' steps. We have used Algorithm 1 as the swap strategy, because the exchange of the first comparison is simple with it.

Our experiments were carried out on an Intel Xeon E5645 at 2.4 GHz with 48 GB Ram running Ubuntu 12.04 with kernel version 3.2.0. The source code was compiled with *gcc* using the *-O2* optimization flag.

In Section 8.1, we will experimentally evaluate the comparison and swap count of the algorithms considered in this paper. In Section 8.2, we will focus on the actual running times needed to sort a given input. The charts of our experiments can be found at the end of this paper.

8.1 Comparison and Swap Count

We first have a look at the comparison and swap count needed to sort a random input of up to 50 000 000 integers. We did not switch to a different sorting algorithm, e.g., insertion sort, to sort short subarrays.

Figure 4 shows the results of our experiments for algorithms that choose the pivots directly. We see that the linear term in the expected comparison count has a big influence on the number of comparisons. For Yaroslavskiy’s algorithm this linear term is $-2.46n$, as calculated by the authors of [12].

The results confirm our theoretical studies and show that our algorithm beats all other algorithms with respect to the comparison count, although we incorporated random sampling directly into the partitioning step. We also see that the modified version of Sedgewick’s algorithm beats Yaroslavskiy’s algorithm. On the other hand, Sedgewick’s original algorithm makes the most key comparisons and is even worse than standard quicksort, as described in Section 4.3.

Figure 5 shows the same experiment for the algorithms that choose the pivots from a small sample. This plot confirms the theoretical results from Section 6.

Figure 6 shows the same experiment for the swap count. These results confirm the theoretical study conducted in Section 7. We see that Sedgewick’s strategy and Dijkstra’s strategy make the most swaps. Yaroslavskiy’s algorithm is clearly

better and shows exactly the behavior calculated for a strategy that uses Meyer’s algorithm. We see that the modified version of Meyer’s algorithm that makes a small random sampling step and then decides which version it uses is better. The best swap strategy—as calculated in Section 7—is Algorithm 3. It almost matches the swap count of standard quicksort. However, in our initial experiments, the running time of this variant was not competitive to algorithms that used Algorithm 1 or Algorithm 2.

8.2 Running Times

We now consider the running times of our algorithms to sort a given input. To measure running times, all algorithms used a small sample to choose the pivots from. Clever quicksort uses the median of a sample of three elements. Yaroslavskiy and our algorithm use the second- and fourth-largest elements from a sample of five elements. We sorted subarrays of size at most 16 directly using insertion sort.

With respect to running times, we see that Yaroslavskiy’s algorithm is superior to the other algorithms when sorting random permutations of $\{1, \dots, n\}$. Our method is about 5% slower, see Figure 7. When sorting strings (and key comparisons become more expensive), our algorithm can actually beat Yaroslavskiy’s algorithm, see Figure 7. However, the difference is only about 2%, see Figure 8

9 Conclusion and Open Questions

We have studied dual pivot quicksort algorithms in a unified way and found an optimal partitioning method w.r.t. minimizing the expected number of key comparisons. For the problem of minimizing swaps we have

- pointed out that comparisons and swaps can be treated independently, and
- brought back into the discussion the obvious connection between dual pivot quicksort and the DNF problem.

While we are now in a situation in which we can present algorithms that both lower the expected comparison count and the expected swap count compared to Yaroslavskiy’s algorithm, the most urgent question is to find an actual implementation that translates these theoretical properties into better running times.

Acknowledgements. The authors thank Thomas Hotz for a useful suggestion regarding the optimal strategy of Section 3, and Pascal Klaue for implementing the algorithms and carrying out initial experiments. The first author thanks Michael Rink for interesting and useful discussions.

References

1. Chen, W.M.: Probabilistic analysis of algorithms for the dutch national flag problem. Theor. Comput. Sci. 341(1-3), 398–410 (2005)

2. Cormen, T.H., Leiserson, C.E., Rivest, R.L., Stein, C.: Introduction to Algorithms (3. ed.). MIT Press (2009)
3. Dijkstra, E.W.: A Discipline of Programming. Prentice-Hall (1976)
4. Dubhashi, D.P., Panconesi, A.: Concentration of Measure for the Analysis of Randomized Algorithms. Cambridge University Press (2009)
5. Hennequin, P.: Analyse en moyenne d'algorithmes: tri rapide et arbres de recherche. Ph.D. thesis, Ecole Polytechnique, Palaiseau (1991)
6. Hoare, C.A.R.: Quicksort. Comput. J. 5(1), 10–15 (1962)
7. Knuth, D.E.: The Art of Computer Programming, Volume III: Sorting and Searching. Addison-Wesley (1973)
8. Meyer, S.J.: A failure of structured programming. Zilog Corp., Software Dept. Technical Rep. No. 5, Cupertino, CA (1978)
9. Sedgewick, R.: Quicksort. Ph.D. thesis, Stanford University (1975)
10. Sedgewick, R.: Quicksort with equal keys. SIAM J. Comput. 6(2), 240–268 (1977)
11. Sedgewick, R., Flajolet, P.: An introduction to the analysis of algorithms. Addison-Wesley-Longman (1996)
12. Wild, S., Nebel, M.E.: Average case analysis of Java 7's dual pivot quicksort. In: ESA'12. pp. 825–836 (2012)
13. Wild, S., Nebel, M.E., Reitzig, R., Laube, U.: Engineering Java 7's dual pivot quicksort using MaLiJan. In: ALENEX'13 (2013)




Fig. 3. Visualization of the decision process when inspecting element a_i . Applying strategy $\mathcal{O}$ from left to right uses that of the remaining elements three are small and two are large, so it decides that a_i should be compared with p first. Applying strategy $\mathcal{H}$ from right to left uses that of the inspected elements three were small but only one was large, so it decides to compare a_i with p first, too. Note that the strategies would differ if one small element would be a medium element.

A Proof of Theorem 2

As mentioned in Section 3, the key idea to analyze the difference between strategy $\mathcal{O}$ and strategy $\mathcal{H}$ is considering the case that on an input $(a_1, \dots, a_n)$ strategy $\mathcal{H}$ inspects the elements in the order $a_1, \dots, a_n$, while strategy $\mathcal{O}$ inspects them in the order $a_n, \dots, a_1$. For a fixed element a_i , $\mathcal{H}$ uses knowledge on the exact number of small resp. large elements in $a_1, \dots, a_{i-1}$, while strategy $\mathcal{O}$ uses knowledge on the exact number of small resp. large elements in $a_1, \dots, a_i$. Thus, there is only a small difference in the decision process of these two strategies. In fact, they can only differ when the number of small and large elements in $a_1, \dots, a_i$ is exactly the same. See Figure 3 for a further explanation.

We can hence calculate the difference in the value of the additional cost term of strategy $\mathcal{H}$ and $\mathcal{O}$ just by analyzing the expected number of positions $2i, i \in \{1, \dots, n/2\}$, in which the number of small elements equals the number of large elements for a random input (so-called *zero-crossings*). Medium elements have no influence on this value, because both strategies need two comparisons for classification.

By symmetry, we assume that the number of small elements is at most as large as the number of large elements. First, we omit medium elements to simplify calculations, i.e., we assume that the number of small and large elements is n . Let Z_n be the random variable that counts the number of zero-crossings for an input of n elements. We calculate:

$$\begin{aligned}
E(Z_n) &= \sum_{1 \leq i \leq n/2} \Pr(\text{there is a zero-crossing at position } 2i) \\
&= \frac{2}{n} \sum_{1 \leq i \leq n/2} \sum_{i \leq s \leq n/2} \Pr(\text{there is a zero-crossing at position } 2i \mid s \text{ small elements}) \\
&= \frac{2}{n} \sum_{1 \leq i \leq n/2} \sum_{i \leq s \leq n/2} \frac{\binom{2i}{i} \cdot \binom{n-2i}{s-i}}{\binom{n}{s}}.
\end{aligned}$$

By using the identity $\binom{2i}{i} = (2^{2i} \Gamma(i + 0.5) / (\sqrt{\pi} \Gamma(i + 1)))$, which gives rise to $\binom{2i}{i} = \Theta(2^{2i} / \sqrt{i})$, and substituting $j = n/2 - s$, we continue by

$$\begin{aligned}
\mathbb{E}(Z_n) &= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{2^{2i}}{\sqrt{i}} \sum_{s=s}^{n/2} \frac{\binom{n-2i}{n-s}}{\binom{n}{s}} \\
&= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{2^{2i}}{\sqrt{i}} \sum_{s=i}^{n/2} \frac{(n-2i) \cdots (n-i-s+1) \cdot s \cdots (s-i+1)}{n \cdots (n-s+1)} \\
&= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{2^{2i}}{\sqrt{i}} \sum_{j=0}^{n/2-i} \frac{(n-2i) \cdots (n/2-i+j+1) \cdot (n/2-j) \cdots (n/2-j-i+1)}{n \cdots (n/2+j+1)} \\
&= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{2^{2i}}{\sqrt{i}} \sum_{j=0}^{n/2-i} \frac{(n/2+j) \cdots (n/2-i+j+1) \cdot (n/2-j) \cdots (n/2-j-i+1)}{n \cdots (n-2i+1)} \\
&= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{1}{\sqrt{i}} \sum_{j=0}^{n/2-i} \frac{(n+2j) \cdots (n+2j-2(i-1)) \cdot (n-2j) \cdots (n-2j-2(i-1))}{n \cdots (n-2i+1)} \\
&= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{n+1}{\sqrt{i}(n-2i+1)} \sum_{j=0}^{n/2-i} \prod_{k=0}^{i-1} \frac{(n+2j-2k)(n-2j-2k)}{(n-2k+1)(n-2k)}.
\end{aligned}$$

We now continue by bounding the latter product.

$$\begin{aligned}
\mathbb{E}(Z_n) &= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{n+1}{\sqrt{i}(n-2i+1)} \sum_{j=0}^{n/2-i} \prod_{k=0}^{i-1} \left(1 - \left(\frac{2j}{n-2k}\right)^2\right) \\
&= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{n+1}{\sqrt{i}(n-2i+1)} \sum_{j=0}^{n/2-i} \prod_{k=0}^{i-1} \left(1 - \left(\frac{2j}{n}\right)^2\right) \\
&= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{n+1}{\sqrt{i}(n-2i+1)} \sum_{j=0}^{n/2-i} \left(1 - \left(\frac{2j}{n}\right)^2\right)^i \\
&= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{n+1}{\sqrt{i}(n-2i+1)} \sum_{j=0}^{n/2} \left(1 - \left(\frac{2j}{n}\right)^2\right)^i \\
&= O\left(\frac{1}{n}\right) \sum_{i=1}^{n/2} \frac{n+1}{\sqrt{i}(n-2i+1)} \left(\int_0^{n/2} \left(1 - \left(\frac{2t}{n}\right)^2\right)^i dt + 1\right).
\end{aligned}$$

Using a standard computer algebra system for the integral, we obtain

$$\mathbb{E}(Z_n) \leq \frac{2}{\sqrt{\pi}n} \sum_{1 \leq i \leq n/2} \frac{n+1}{\sqrt{i}(n-2i+1)} \cdot \left(O(1) \cdot \frac{n \cdot \Gamma(i+1)}{\Gamma(i+3/2)} + 1\right).$$

Since $\Gamma(i+1)/\Gamma(i+3/2) = \Theta(1/\sqrt{i})$, we continue by calculating

$$\begin{aligned} \mathbb{E}(Z_n) &\leq O(1) \cdot \sum_{1 \leq i \leq n/2} \frac{n+1}{i(n-2i+1)} \\ &\leq O(1) \cdot \left(\sum_{1 \leq i \leq n/4} \frac{1}{i} + \sum_{n/4+1 \leq i \leq n/2} \frac{1}{n-2i+1} \right) = O(\log n). \end{aligned}$$

Now, we consider the case that the input contains medium elements. Fix the number of small elements and the number of large elements. Since medium elements have no influence on the value of the additional cost term, we have that $\mathbb{E}(Z_n \mid s \text{ small, } m \text{ medium, } \ell \text{ large elements, } s+m+l=n)$ equals $\mathbb{E}(Z_{s+\ell} \mid s \text{ small, } \ell \text{ large elements})$, i.e., equals the expected value of zero-crossings for a smaller input containing $s+\ell$ elements.

We can now simply calculate the expected number of zero-crossing for an arbitrary input as follows:

$$\begin{aligned} \mathbb{E}(Z_n) &= \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n} \mathbb{E}(Z_n \mid s, \ell) \\ &= \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n} \mathbb{E}(Z_{s+\ell} \mid s, \ell) \\ &= \frac{1}{\binom{n}{2}} \sum_{s+\ell \leq n} O(\log(s+\ell)) = O(\log n), \end{aligned}$$

which concludes the proof of Theorem 2. $\square$

We will now show that such a small error term does not increase the expected comparison count by more than a linear term.

Lemma 2. *Let $n \in \mathbb{N}$, and let a be a constant with $a > 0$.*

If $\mathbb{E}(P_n) = a \cdot n + O(\log n)$, then $\mathbb{E}(C_n) = 6/5 \cdot a \cdot n \ln n + O(n)$.

Proof. We show by induction on the input size that the contribution of the $O(\log n)$ terms sum up to at most $O(n)$ for the total expected comparison count. To make this precise, let c be a constant such that the error term is at most $c \ln n$. Let $\mathbb{E}(A_n)$ denote the sum of the error terms in the expected comparison count.

We will show that

$$\mathbb{E}(A_n) \leq C \cdot n - D \ln n. \quad (11)$$

Let $D \geq c/5$. For the base case, let $n_0 \in \mathbb{N}$ and set C such that $\mathbb{E}(A_n) \leq C \cdot n - D \ln n$ for all $n < n_0$. As the induction hypothesis, assume that (11) holds

for all $n' < n$. For the induction step, we calculate:

$$\begin{aligned}
E(A_n) &= \frac{1}{\binom{n}{2}} \sum_{s+m+\ell=n} E(A_n \mid s, m, \ell) \\
&\leq C \cdot n + \frac{1}{\binom{n}{2}} \sum_{s+m+\ell=n} (c \ln n - D \cdot (\ln s + \ln m + \ln \ell)) \\
&= C \cdot n + c \ln n - \frac{3}{\binom{n}{2}} \sum_{s+m+\ell=n} (D \cdot \ln s) \\
&= C \cdot n + c \ln n - \frac{6}{n} \sum_{1 \leq s \leq n} (D \cdot \ln s)
\end{aligned}$$

Now we use that $\sum_{i=a}^b f(i) \geq \int_a^b f(x) dx$ and obtain

$$\begin{aligned}
E(A_n) &\leq C \cdot n + c \ln n - \frac{6D}{n} \cdot (n \ln n - n + 1) \\
&= C \cdot n + c \ln n - 6D \cdot (\ln n - 1 + 1/n).
\end{aligned}$$

Finally, we calculate

$$\begin{aligned}
c \ln n - 6D(\ln n - 1 + 1/n) &\leq -D \ln n \\
c \ln n &\leq 5D \ln n - 6D + 6D/n \\
\frac{c}{5} &\leq D.
\end{aligned}$$

Thus, the additional $O(\log n)$ terms sum up to $O(n)$ in the total expected comparison count. The leading term in the lemma follows directly from (4). $\square$

B Dual Pivot Quicksort Algorithms

A dual pivot quicksort method has the following general form:

Algorithm 4 (Dual Pivot Quicksort).

```

procedure  $DQS(A, left, right)$ 
(1)   if  $right - left \geq 1$  then
(2)       if  $A[left] > A[right]$  then
(3)           swap  $A[left]$  and  $A[right]$ 
(4)        $p := A[left]$ ;
(5)        $q := A[right]$ ;
(6)        $partition(A, p, q, left, right, pos_p, pos_q)$ 
(7)        $DQS(A, left, pos_p - 1)$ 
(8)        $DQS(A, pos_p + 1, pos_q - 1)$ 
(9)        $DQS(A, pos_q + 1, right)$ 

```

(10) **end if**

To get an actual algorithm we have to implement a *partition* function that partitions the input as depicted in Figure 1. A partition procedure in this paper has two output variables pos_p and pos_q that are used to return the positions of the two pivots in the partitioned array.

B.1 Partitioning Methods Based on Sedgewick's Algorithm

Algorithm 5 shows Sedgewick's partitioning method as studied in [9].

Algorithm 5 (Sedgewick's Partitioning Method).

```

procedure S-Partition( $A, p, q, \text{left}, \text{right}, \text{pos}_p, \text{pos}_q$ )
1    $i := i_1 := \text{left}; j := j_1 := \text{right};$ 
2   while true
3        $i := i + 1;$ 
4       while  $A[i] \leq q;$ 
5           if  $i \geq j$  then break outer while end if
6           if  $A[i] < p$  then  $A[i_1] := A[i]; i_1 := i_1 + 1; A[i] := A[i_1]$  end if
7            $i := i + 1;$ 
8       end while
9        $j := j - 1;$ 
10      while  $A[j] \geq p;$ 
11          if  $A[j] > q$  then  $A[j_1] := A[j]; j_1 := j_1 - 1; A[j] := A[j_1]$  end if
12          if  $i \geq j$  then break outer while end if
13           $j := j - 1;$ 
14      end while
15       $A[i_1] := A[j]; A[j_1] := A[i];$ 
16       $i_1 := i_1 + 1; j_1 := j_1 - 1;$ 
17       $A[i] := A[i_1]; A[j] := A[j_1];$ 
18  end while
19   $A[i_1] := p; A[j_1] := q;$ 
20   $\text{pos}_p := i_1; \text{pos}_q := j_1;$ 

```

Algorithm 6 shows an implementation of the modified partitioning strategy from Section 4.3.

Algorithm 6 (Sedgewick's Partitioning Method, modified).

```

procedure S2-Partition( $A, p, q, \text{left}, \text{right}, \text{pos}_p, \text{pos}_q$ )
1    $i := i_1 := \text{left}; j := j_1 := \text{right};$ 
2   while true
3        $i := i + 1;$ 
4       while true
5           if  $i \geq j$  then break outer while end if
6           if  $A[i] < p$  then  $A[i_1] := A[i]; i_1 := i_1 + 1; A[i] := A[i_1]$ 

```

```

7         else if  $A[i] > q$  then break inner while end if
8          $i := i + 1$ ;
9     end while
10     $j := j - 1$ ;
11    while true
12        if  $A[j] > q$  then  $A[j_1] := A[j]$ ;  $j_1 := j_1 - 1$ ;  $A[j] := A[j_1]$ 
13        else if  $A[i] > q$  then break inner while end if
14        if  $i \geq j$  then break outer while end if
15         $j := j - 1$ ;
16    end while
17     $A[i_1] := A[j]$ ;  $A[j_1] := A[i]$ ;
18     $i_1 := i_1 + 1$ ;  $j_1 := j_1 - 1$ ;
19     $A[i] := A[i_1]$ ;  $A[j] := A[j_1]$ ;
20 end while
21  $A[i_1] := p$ ;  $A[j_1] := q$ ;
22  $pos_p := i_1$ ;  $pos_q := j_1$ ;

```

B.2 Yaroslavskiy's Partitioning Method

Algorithm 7 shows the partition method of Yaroslavskiy's algorithm as studied in [12].

Algorithm 7 (Yaroslavskiy's Partitioning Method).

```

procedure Y-Partition( $A, p, q, left, right, pos_p, pos_q$ )
1     $l := left + 1$ ;  $g := right - 1$ ;  $k := 1$ 
2    while  $k \leq g$ 
3        if  $A[k] < p$ 
4            swap  $A[k]$  and  $A[l]$ 
5             $l := l + 1$ 
6        else
7            if  $A[k] > q$ 
8                while  $A[g] > q$  and  $k < g$  do  $g := g - 1$  end while
9                swap  $A[k]$  and  $A[g]$ 
10                $g := g - 1$ 
11               if  $A[k] < p$ 
12                   swap  $A[k]$  and  $A[l]$ 
13                    $l := l + 1$ 
14               end if
15           end if
16       end if
17        $k := k + 1$ 
18   end while
19   swap  $A[left]$  and  $A[l - 1]$ 
20   swap  $A[right]$  and  $A[g + 1]$ 
21    $pos_p := l - 1$ ;  $pos_q := g + 1$ ;

```

B.3 Algorithms For the New Partitioning Method

Algorithm 8 presents the partitioning algorithm that always compares to the smaller pivot first.

Algorithm 8 (Simple Partitioning Method (smaller pivot first)).

```
procedure SimplePartitionSmall( $A, p, q, left, right, pos_p, pos_q$ )
1    $l := left + 1; g := right - 1; k := 1$ 
2   while  $k \leq g$ 
3       if  $A[k] < p$ 
4           swap  $A[k]$  and  $A[l]$ 
5            $l := l + 1$ 
6            $k := k + 1$ 
7       else
8           if  $A[k] < q$ 
9                $k := k + 1$ 
10          else
11              swap  $A[k]$  and  $A[g]$ 
12               $g := g - 1$ 
13          end if
14      end if
15  end while
16  swap  $A[left]$  and  $A[l - 1]$ 
17  swap  $A[right]$  and  $A[g + 1]$ 
18   $pos_p := l - 1; pos_q := g + 1$ 
```

Algorithm 9 presents the partitioning algorithm that always compares to the larger pivot first.

Algorithm 9 (Simple Partitioning Method (larger pivot first)).

```
procedure SimplePartitionLarge( $A, p, q, left, right, pos_p, pos_q$ )
1    $l := left + 1; g := right - 1; k := 1$ 
2   while  $k \leq g$ 
3       if  $A[k] > q$ 
4           swap  $A[k]$  and  $A[g]$ 
5            $g := g - 1$ 
6       else
7           if  $A[k] < p$ 
8               swap  $A[k]$  and  $A[l]$ 
9                $l := l + 1$ 
10          end if
11           $k := k + 1$ 
12      end if
13  end while
```

```
15   end while
16   swap  $A[left]$  and  $A[l - 1]$ 
17   swap  $A[right]$  and  $A[g + 1]$ 
18    $pos_p := l - 1; pos_q := g + 1$ 
```

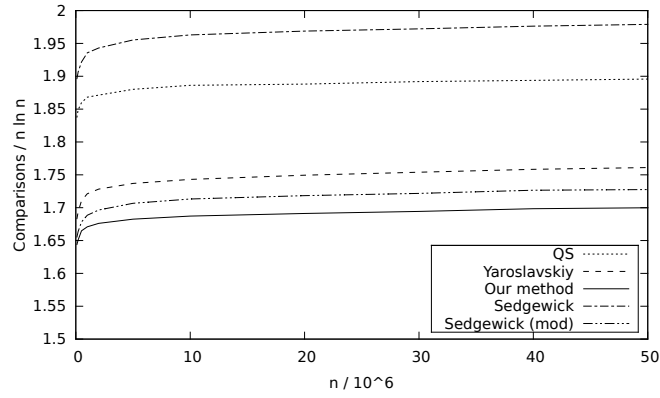


Fig. 4. Comparison count (scaled by $n \ln n$) needed to sort a random input of up to $n = 50\,000\,000$ integers for algorithms that choose the pivots directly.

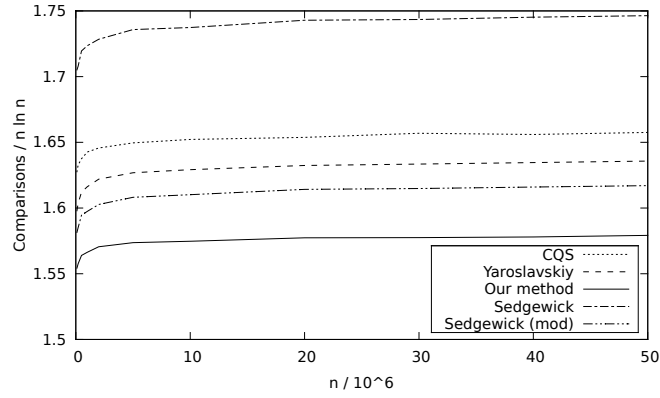


Fig. 5. Comparison count (scaled by $n \ln n$) needed to sort a random input of up to $n = 50\,000\,000$ integers for algorithms that choose the pivots from a sample.

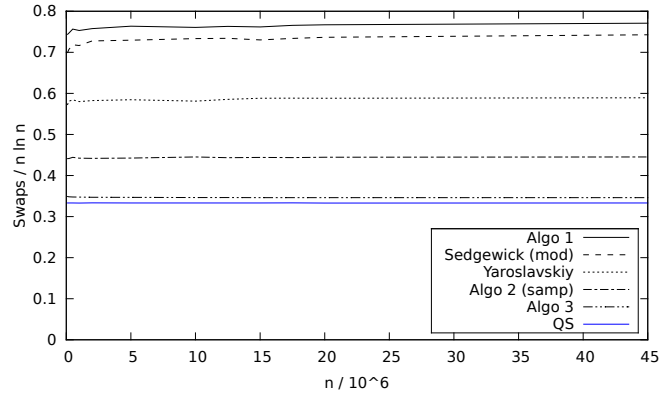


Fig. 6. Swap count (scaled by $n \ln n$) needed to sort a random input of up to $n = 50\,000\,000$ integers for algorithms that choose the pivots directly.

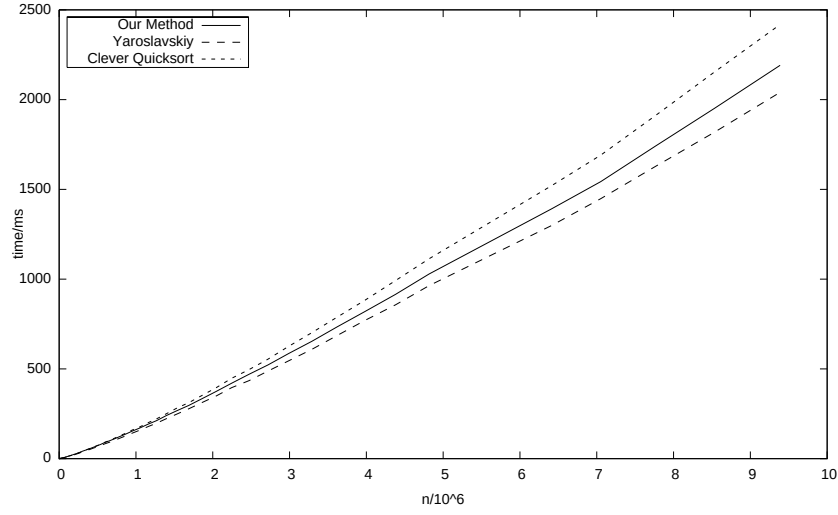


Fig. 7. Running time (in milliseconds) needed to sort a random permutation of $\{1, \dots, n\}$. Running times were averaged over 1000 trials for each n .

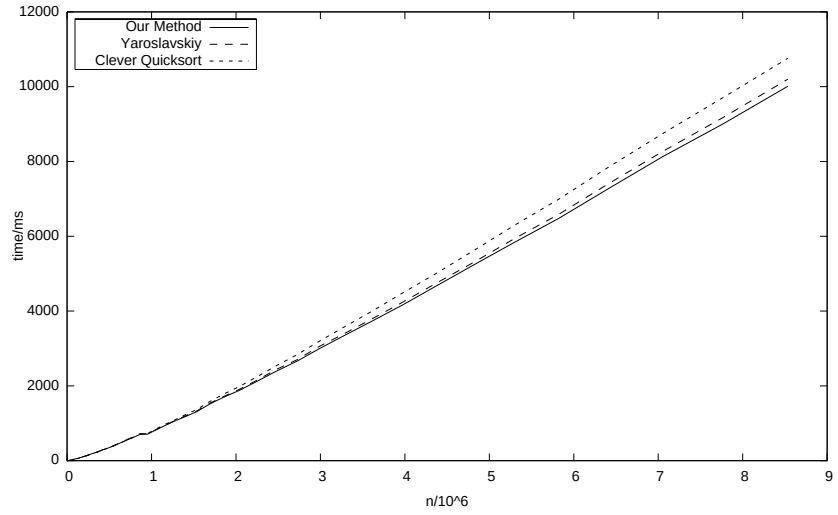


Fig. 8. Running time (in milliseconds) needed to sort a random set of n article headers of the English Wikipedia. Running times were averaged over 1000 trials for each n .